

Wiring diagram RM8xx1 :

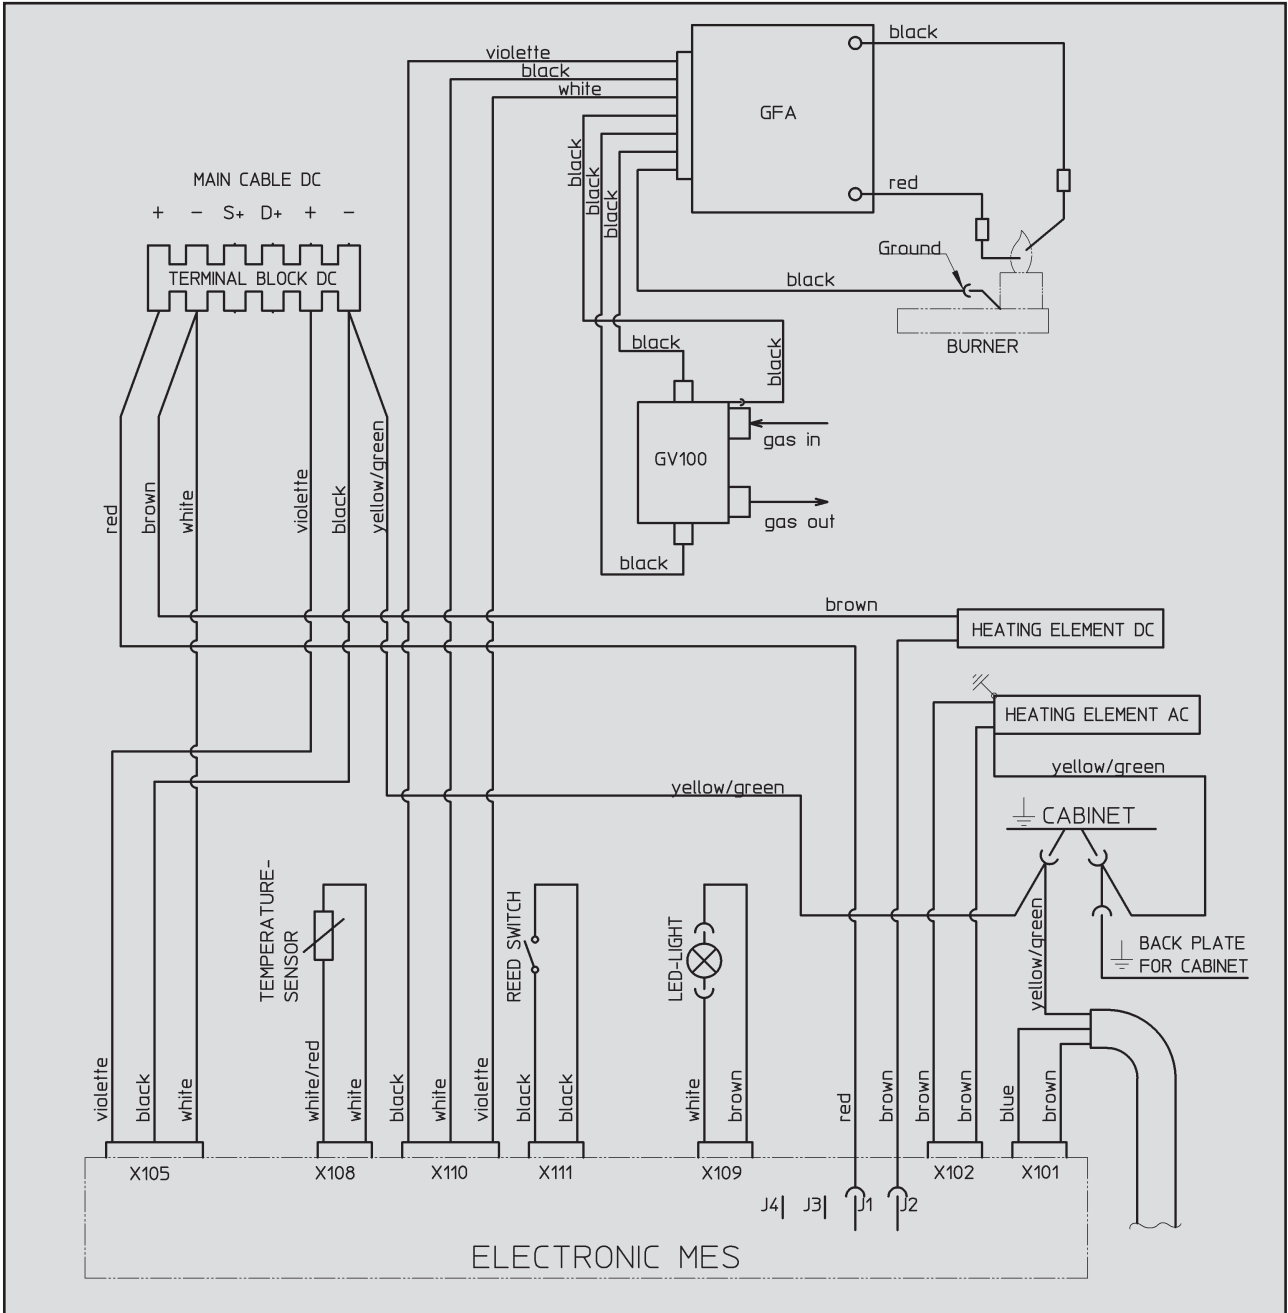


Fig. E37



For operation, it is compulsory to provide the device with a permanent 12V DC connection at terminals C/D (permanent voltage supply for the functional electronics).